



35SA





MODEL TDW 35SA HRC-1-T1

OPTIONAL WOOD FILLED OR STEEL PLATE AND TRACTION BAR FRONT RAMPs

OPTIONAL HONDA POWER PACKAGE AND COVER

OPTIONAL REAR BRIDGE FENDERS (AT TIME OF MANUFACTURE)

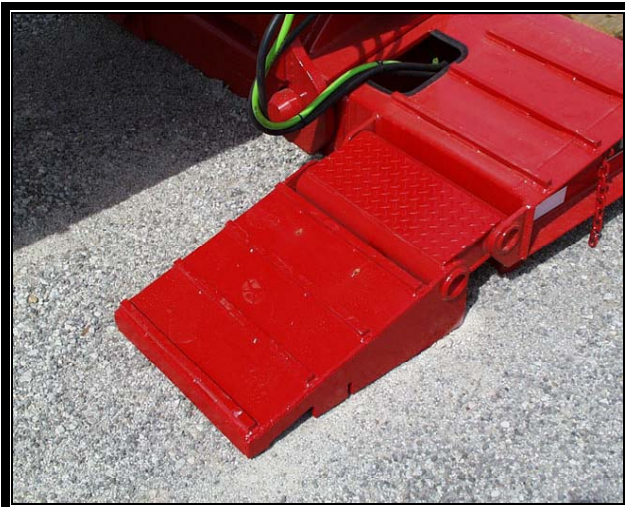

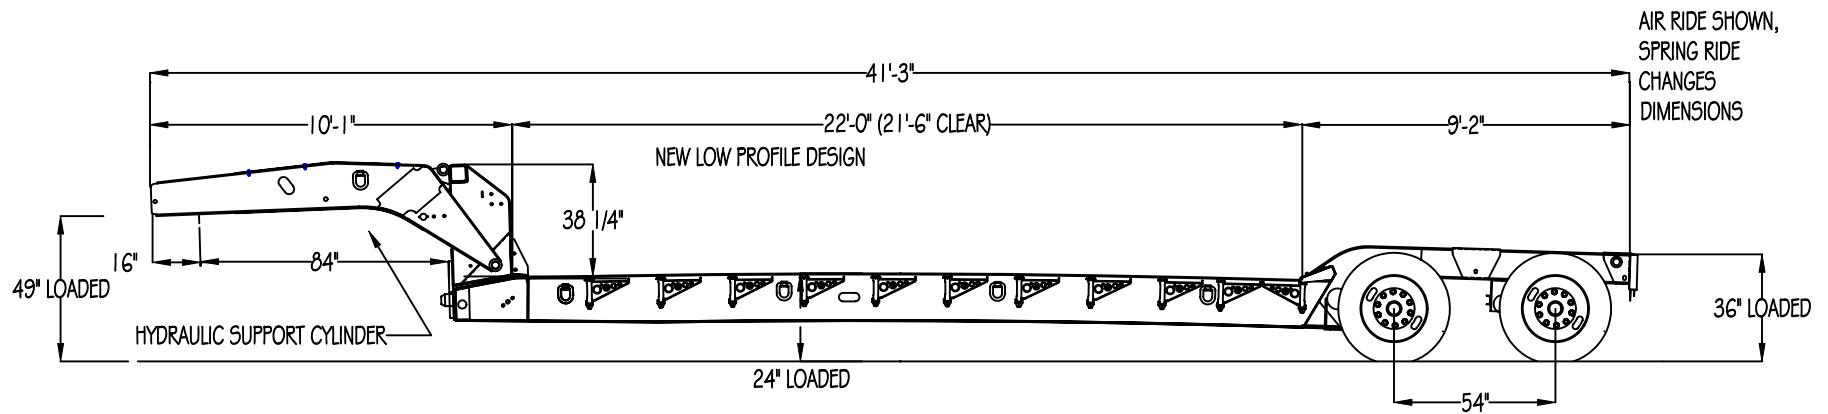

TDW-35SA-HRG-1-T1

NON GROUND BEARING LOW PROFILE DESIGN GOOSENECK
 84" SWING RADIUS (96" OPTIONAL)
 HYDRAULIC SUPPORT CYLINDER (STANDARD)
 FRONT FOLDING RAMPS: (OPTIONAL)
 22'-0" DECK LENGTH (20'-0", 24'-0" OPTIONS)
 1 2" SWING/REMOVABLE OUTRIGGERS
 8'-6" WIDE DECK AND REAR BRIDGE
 24" LOADED DECK HEIGHT
 8" LOADED ROAD CLEARANCE
 HIGH STRENGTH 100,000# MINIMUM YIELD STEEL

AXLES: 25,000# CAPACITY
 SUSPENSION: AIR RIDE (SPRING AVAILABLE)
 TIRES: 255/70R22.5 (H)
 WHEELS: STEEL DISC - HUB PILOTTED, OUTBOARD MOUNTING
 OPTIONAL 3RD AXLE AVAILABLE (REQUIRES OPTION AT TIME OF ORDER)
 BOLSTERS AND HALF BOLSTER ON REAR BRIDGE
 FRONT BRIDGE RAMP
 BOOMWELL IN REAR BRIDGE SECTION
 SPRING PARKING BRAKE ON ONE AXLE
 ANTI - LOCK BRAKE SYSTEM



NOTE: All Specifications Subject To Change Without Notice. All Weights And Dimensions
 Approximate - Shown In A Fully Loaded Position
 Platform Heights Will Increase If Loaded At Less Than Full Capacity

Talbert Manufacturing Inc.
 1628 W. State Road 114
 Rensselaer Indiana 47978
 1-800-348-5232
 Fax 219-866-5437
www.Talbertmfg.com